

切削工具样本 Cutting Tools Catalog

SOLID CARBIDE

Endmill | Thread Milling
Drills | Anti-vibration Boring Bar



东莞市钰泽机械工具有限公司
YUZE(DONGGUAN)MACHINING TOOLS CO.,LTD.

Add: 东莞市长安镇锦厦社区长安商贸城五金广场H栋5-6号
Room 6, Building H, Changan Commercial Center,
Changan Town, Dongguan city, Guangdong province, PRC
Tel: +86 0769-21018541
Fax: +86 0769-81075581
QQ: 569075441 408279127
E-mail: Scott.Jiang@yuzemachinery.com
Web: <http://www.yuzemachinery.com>



SOLID CARBIDE

Endmill | Thread Milling | Drills | Anti-vibration Boring Bar




Vol.02
2022.6-

Solid Carbide Endmill

高端·高品质



YA552M 铝用微小径铣刀 (2F) YA552M Micro Diameter End Mill For Aluminum

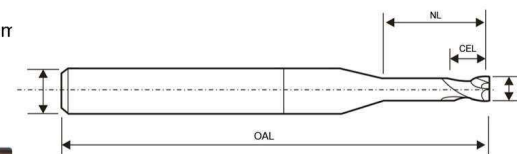


技术参数/ Technology Parameters



被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.1*0.2*D4*50L*2T	φ0.1	0.2	4	50
D0.15*0.3*D4*50L*2T	φ0.15	0.3	4	50
D0.2*0.4*D4*50L*2T	φ0.2	0.4	4	50
D0.21*0.42*D4*50L*2T	φ0.21	0.42	4	50
D0.22*0.44*D4*50L*2T	φ0.22	0.44	4	50
D0.23*0.46*D4*50L*2T	φ0.23	0.46	4	50
D0.24*0.48*D4*50L*2T	φ0.24	0.48	4	50
D0.25*0.5*D4*50L*2T	φ0.25	0.5	4	50
D0.26*0.52*D4*50L*2T	φ0.26	0.52	4	50
D0.27*0.54*D4*50L*2T	φ0.27	0.54	4	50
D0.28*0.56*D4*50L*2T	φ0.28	0.56	4	50
D0.29*0.58*D4*50L*2T	φ0.29	0.58	4	50
D0.3*0.6*D4*50L*2T	φ0.30	0.6	4	50
D0.31*0.62*D4*50L*2T	φ0.31	0.62	4	50
D0.32*0.64*D4*50L*2T	φ0.32	0.64	4	50
D0.33*0.66*D4*50L*2T	φ0.33	0.66	4	50
D0.34*0.68*D4*50L*2T	φ0.34	0.68	4	50
D0.35*0.7*D4*50L*2T	φ0.35	0.7	4	50
D0.36*0.72*D4*50L*2T	φ0.36	0.72	4	50
D0.37*0.74*D4*50L*2T	φ0.37	0.74	4	50
D0.38*0.76*D4*50L*2T	φ0.38	0.76	4	50
D0.39*0.78*D4*50L*2T	φ0.39	0.78	4	50

■ YA552M 铝用微小径铣刀 (2F)
YA552M Micro Diameter End Mill For Aluminum (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/PCD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
							●		

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.4*0.8*D4*50L*2T	φ0.40	0.8	4	50
D0.41*0.82*D4*50L*2T	φ0.41	0.82	4	50
D0.42*0.84*D4*50L*2T	φ0.42	0.84	4	50
D0.43*0.86*D4*50L*2T	φ0.43	0.86	4	50
D0.44*0.88*D4*50L*2T	φ0.44	0.88	4	50
D0.45*0.9*D4*50L*2T	φ0.45	0.9	4	50
D0.46*0.92*D4*50L*2T	φ0.46	0.92	4	50
D0.47*0.94*D4*50L*2T	φ0.47	0.94	4	50
D0.48*0.96*D4*50L*2T	φ0.48	0.96	4	50
D0.49*0.98*D4*50L*2T	φ0.49	0.98	4	50
D0.5*1*D4*50L*2T	φ0.50	1	4	50
D0.51*1.02*D4*50L*2T	φ0.51	1.02	4	50
D0.52*1.04*D4*50L*2T	φ0.52	1.04	4	50
D0.53*1.06*D4*50L*2T	φ0.53	1.06	4	50
D0.54*1.08*D4*50L*2T	φ0.54	1.08	4	50
D0.55*1.1*D4*50L*2T	φ0.55	1.1	4	50
D0.56*1.12*D4*50L*2T	φ0.56	1.12	4	50
D0.57*1.14*D4*50L*2T	φ0.57	1.14	4	50
D0.58*1.16*D4*50L*2T	φ0.58	1.16	4	50
D0.59*1.18*D4*50L*2T	φ0.59	1.18	4	50
D0.6*1.2*D4*50L*2T	φ0.60	1.2	4	50
D0.61*1.22*D4*50L*2T	φ0.61	1.22	4	50
D0.62*1.24*D4*50L*2T	φ0.62	1.24	4	50
D0.63*1.26*D4*50L*2T	φ0.63	1.26	4	50
D0.64*1.28*D4*50L*2T	φ0.64	1.28	4	50
D0.65*1.3*D4*50L*2T	φ0.65	1.3	4	50

■ YA552M 铝用微小径铣刀 (2F)
YA552M Micro Diameter End Mill For Aluminum (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/PCD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
							●		

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.66*1.32*D4*50L*2T	φ0.66	1.32	4	50
D0.67*1.34*D4*50L*2T	φ0.67	1.34	4	50
D0.68*1.36*D4*50L*2T	φ0.68	1.36	4	50
D0.69*1.38*D4*50L*2T	φ0.69	1.38	4	50
D0.7*1.4*D4*50L*2T	φ0.70	1.4	4	50
D0.71*1.42*D4*50L*2T	φ0.71	1.42	4	50
D0.72*1.44*D4*50L*2T	φ0.72	1.44	4	50
D0.73*1.46*D4*50L*2T	φ0.73	1.46	4	50
D0.74*1.48*D4*50L*2T	φ0.74	1.48	4	50
D0.75*1.5*D4*50L*2T	φ0.75	1.5	4	50
D0.76*1.52*D4*50L*2T	φ0.76	1.52	4	50
D0.77*1.54*D4*50L*2T	φ0.77	1.54	4	50
D0.78*1.56*D4*50L*2T	φ0.78	1.56	4	50
D0.79*1.58*D4*50L*2T	φ0.79	1.58	4	50
D0.8*1.6*D4*50L*2T	φ0.80	1.6	4	50
D0.81*1.62*D4*50L*2T	φ0.81	1.62	4	50
D0.82*1.64*D4*50L*2T	φ0.82	1.64	4	50
D0.83*1.66*D4*50L*2T	φ0.83	1.66	4	50
D0.84*1.68*D4*50L*2T	φ0.84	1.68	4	50
D0.85*1.7*D4*50L*2T	φ0.85	1.7	4	50
D0.86*1.72*D4*50L*2T	φ0.86	1.72	4	50
D0.87*1.74*D4*50L*2T	φ0.87	1.74	4	50
D0.88*1.76*D4*50L*2T	φ0.88	1.76	4	50
D0.89*1.78*D4*50L*2T	φ0.89	1.78	4	50
D0.9*1.8*D4*50L*2T	φ0.90	1.8	4	50
D0.95*1.9*D4*50L*2T	φ0.95	1.9	4	50

平底铣刀 Square Endmill	球头铣刀 Ball Endmill	长颈球刀 Long Neck Ball Endmill	圆鼻铣刀 Radius Endmill	长颈圆鼻 Long Neck Radius Endmill	螺纹铣刀 Thread Milling	钻头 Drilling	螺纹刀头 Thread Cutter Head	抗震刀杆 Anti-vibration Holder	刀粒 Cutter Insert
------------------------	----------------------	--------------------------------	------------------------	----------------------------------	------------------------	----------------	----------------------------	-------------------------------	---------------------

YA552A 铝用标准长铣刀 (2F)
YA552A Standard Square Endmill For Aluminum (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/ICD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	●	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*2*D4*50L*2T	1	2	4	50
D1*3*D4*50L*2T	1	3	4	50
D1.5*3*D4*50L*2T	1.5	3	4	50
D1.5*4.5*D4*50L*2T	1.5	4.5	4	50
D2*4*D4*50L*2T	2	4	4	50
D2*6*D4*50L*2T	2	6	4	50
D2.5*5*D4*50L*2T	2.5	5	4	50
D2.5*7.5*D4*50L*2T	2.5	7.5	4	50
D3*6*D4*50L*2T	3	6	4	50
D3*9*D4*50L*2T	3	9	4	50
D4*8*D4*50L*2T	4	8	4	50
D4*10*D4*50L*2T	4	10	4	50
D4*12*D4*50L*2T	4	12	4	50
D5*15*D6*50L*2T	5	15	6	50
D6*12*D6*50L*2T	6	12	6	50
D6*18*D6*50L*2T	6	18	6	50
D8*20*D8*60L*2T	8	20	8	60
D10*25*D10*75L*2T	10	25	10	75

YA552D 铝用非标小数点铣刀 (2F)
YA552D Decimal Point Size Endmill For Aluminum (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	●	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1.1*3.2*D4*50L*2T	1.1	3.3	4	50
D1.2*3.6*D4*50L*2T	1.2	3.6	4	50
D1.3*3.9*D4*50L*2T	1.3	3.9	4	50
D1.4*4.2*D4*50L*2T	1.4	4.2	4	50
D1.6*4.8*D4*50L*2T	1.6	4.8	4	50
D1.7*5.1*D4*50L*2T	1.7	5.1	4	50
D1.8*5.4*D4*50L*2T	1.8	5.4	4	50
D1.9*5.7*D4*50L*2T	1.9	5.7	4	50
D2.1*6.3*D4*50L*2T	2.1	6.3	4	50
D2.2*6.6*D4*50L*2T	2.2	6.6	4	50
D2.3*6.9*D4*50L*2T	2.3	6.9	4	50
D2.4*7.2*D4*50L*2T	2.4	7.2	4	50
D2.6*7.8*D4*50L*2T	2.6	7.8	4	50
D2.7*8.1*D4*50L*2T	2.7	8.1	4	50
D2.8*8.4*D4*50L*2T	2.8	8.4	4	50
D2.9*8.7*D4*50L*2T	2.9	8.7	4	50
D3.1*9.3*D4*50L*2T	3.1	9.3	4	50
D3.2*9.6*D4*50L*2T	3.2	9.6	4	50
D3.3*9.9*D4*50L*2T	3.3	9.9	4	50
D3.4*10.2*D4*50L*2T	3.4	10.2	4	50
D3.5*10.5*D4*50L*2T	3.5	10.5	4	50
D3.6*10.8*D4*50L*2T	3.6	10.8	4	50
D3.7*11.1*D4*50L*2T	3.7	11.1	4	50
D3.8*11.4*D4*50L*2T	3.8	11.4	4	50
D3.9*11.7*D4*50L*2T	3.9	11.7	4	50

■ YA553F 铝用铣刀双刃带 (3F)

YA553F Double Cutting Lip For Aluminum Endmill (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)									
碳素鋼/合金鋼 Carbon Steel/Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C, S50C, SCM	S45C, SKT, SKD	S45C, SKT, SKD	SKT, SKD	SKT, SKD	FC/FCD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*3T	1	3	4	50
D1.5*4.5*D4*50L*3T	1.5	4.5	4	50
D2*6*D4*50L*3T	2	6	4	50
D2.5*7.5*D4*50L*3T	2.5	7.5	4	50
D3*9*D3*50L*3T	3	9	3	50
D3*9*D4*50L*3T	3	9	4	50
D4*12*D4*50L*3T	4	12	4	50
D5*15*D6*50L*3T	5	15	6	50
D6*18*D6*50L*3T	6	18	6	50
D6*20*D6*50L*3T	6	20	6	50
D7*21*D8*60L*3T	7	21	8	60
D8*24*D8*60L*3T	8	24	8	60
D10*30*D10*75L*3T	10	30	10	75
D12*36*D12*75L*3T	12	36	12	75
D4*14*D4*75L*3T	4	14	4	75
D4*20*D4*100L*3T	4	20	4	100
D5*20*D6*100L*3T	5	20	6	100
D6*30*D6*75L*3T	6	30	6	75
D6*25*D6*100L*3T	6	25	6	100
D6*40*D6*100L*3T	6	40	6	100
D8*35*D8*100L*3T	8	35	8	100
D10*40*D10*100L*3T	10	40	10	100
D12*45*D12*100L*3T	12	45	12	100
D16*45*D16*100L*3T	16	45	16	100
D8*50*D8*150L*3T	8	50	8	150
D10*55*D10*150L*3T	10	55	10	150
D12*60*D12*150L*3T	12	60	12	150
D16*70*D16*150L*3T	16	70	16	150

■ YA553S 铝用铣刀单刃带 (3F)

YA553S Single Cutting Lip For Aluminum Square Shape Endmill (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)									
碳素鋼/合金鋼 Carbon Steel/Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C, S50C, SCM	S45C, SKT, SKD	S45C, SKT, SKD	SKT, SKD	SKT, SKD	FC/FCD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*3T	1	3	4	50
D1.5*4.5*D4*50L*3T	1.5	4.5	4	50
D2*6*D4*50L*3T	2	6	4	50
D2.5*7.5*D4*50L*3T	2.5	7.5	4	50
D3*9*D3*50L*3T	3	9	3	50
D3*9*D4*50L*3T	3	9	4	50
D4*12*D4*50L*3T	4	12	4	50
D5*15*D6*50L*3T	5	15	6	50
D6*18*D6*50L*3T	6	18	6	50
D6*20*D6*50L*3T	6	20	6	50
D7*21*D8*60L*3T	7	21	8	60
D8*24*D8*60L*3T	8	24	8	60
D10*30*D10*75L*3T	10	30	10	75
D12*36*D12*75L*3T	12	36	12	75

YA553HL 高光铝用铣刀 (3F)
YA553HL Fine Finish Endmill For Aluminum (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/ FCD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
							●			

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*3T	1	3	4	50
D1.5*5*D4*50L*3T	1.5	5	4	50
D2*6*D4*50L*3T	2	6	4	50
D2.5*8*D4*50L*3T	2.5	8	4	50
D3*9*D4*50L*3T	3	9	4	50
D4*12*D4*50L*3T	4	12	4	50
D5*15*D6*50L*3T	5	15	6	50
D6*18*D6*50L*3T	6	18	6	50
D7*21*D8*60L*3T	7	21	8	60
D8*24*D8*60L*3T	8	24	8	60
D9*27*D10*75L*3T	9	27	10	75
D10*30*D10*75L*3T	10	30	10	75
D11*33*D12*75L*3T	11	33	12	75
D12*36*D12*75L*3T	12	36	12	75
D14*45*D14*100L*3T	14	45	14	100
D16*50*D6*100L*3T	16	50	16	100
D20*50*D20*100L*3T	20	50	20	100

YA553HE 高效铝用铣刀 (3F)
YA553HE High Efficiency And Fine Finish EndMill For Aluminum (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	●	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*3T	1	3	4	50
D1.5*5*D4*50L*3T	1.5	5	4	50
D2*6*D4*50L*3T	2	6	4	50
D2.5*8*D4*50L*3T	2.5	8	4	50
D3*12*D6*50L*3T	3	12	6	50
D3*8*D6*50L*3T	3	8	6	50
D4*11*D6*50L*3T	4	11	6	50
D4*16*D6*55L*3T	4	16	6	55
D5*13*D6*50L*3T	5	13	6	50
D5*20*D6*60L*3T	5	20	6	60
D6*16*D6*50L*3T	6	16	6	50
D6*24*D6*65L*3T	6	24	6	65
D8*20*D6*60L*3T	8	20	8	60
D8*32*D8*90L*3T	8	32	8	90
D10*25*D10*72L*3T	10	25	10	72
D10*40*D10*100L*3T	10	40	10	100
D12*30*D12*75L*3T	12	30	12	75
D12*48*D12*110L*3T	12	48	12	110
D14*35*D16*100L*3T	14	35	16	100
D16*40*D16*100L*3T	16	40	16	100
D16*64*D16*140L*3T	16	64	16	140
D18*40*D20*100L*3T	18	40	20	100
D20*40*D20*100L*3T	20	40	20	100
D20*80*D20*160L*3T	20	80	20	160

YA553YC 高效铝用铣刀 (3F)
YA553YC High Efficiency Endmills For Aluminum (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/ICD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	●	-	-	-

規格 (Specification)	刃徑 (CED)	刃長 (CEL)	柄徑 (SD)	總長 (OAL)
D3*9*D4*50L*3T	3	9	4	50
D4*12*D4*50L*3T	4	12	4	50
D3*9*D6*50L*3T	3	9	6	50
D4*12*D6*50L*3T	4	12	6	50
D5*15*D6*50L*3T	5	15	6	50
D6*18*D6*50L*3T	6	18	6	50
D8*24*D8*60L*3T	8	24	8	60
D10*30*D10*75L*3T	10	30	10	75
D12*36*D12*75L*3T	12	36	12	75
D16*50*D16*100L*3T	16	50	16	100
D20*60*D20*120L*3T	20	60	20	120

YA-DLC3A 铜铝专用平底铣刀 (3F)
YA-DLC3A Coated Square Corner Endmill For Copper And Aluminum (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	●	-	-	-

規格	刃徑 (CED)	刃長 (CEL)	柄徑 (SD)	總長 (OAL)
D0.5*1*D4*50L*3T	0.5	1	4	50
D0.8*2*D4*50L*3T	0.8	2	4	50
D1*3*D4*50L*3T	1	3	4	50
D1.5*5*D4*50L*3T	1.5	5	4	50
D2*6*D4*50L*3T	2	6	4	50
D2.5*8*D4*50L*3T	2.5	8	4	50
D3*8*D4*50L*3T	3	8	4	50
D3*9*D4*75L*3T	3	9	4	75
D3*12*D4*100L*3T	3	12	4	100
D4*12*D4*50L*3T	4	12	4	50
D4*12*D4*75L*3T	4	12	4	75
D4*16*D4*100L*3T	4	16	4	100
D5*15*D5*50L*3T	5	15	5	50
D5*15*D6*50L*3T	5	15	6	50
D5*15*D6*75L*3T	5	15	6	75
D5*20*D6*100L*3T	5	20	6	100
D6*18*D6*50L*3T	6	18	6	50
D6*24*D6*75L*3T	6	24	6	75
D6*24*D6*100L*3T	6	24	6	100
D8*24*D8*60L*3T	8	24	8	60
D8*24*D8*75L*3T	8	24	8	75
D8*32*D8*100L*3T	8	32	8	100
D8*32*D8*150L*3T	8	32	8	150
D10*30*D10*75L*3T	10	30	10	75
D10*30*D10*100L*3T	10	30	10	100
D10*40*D10*150L*3T	10	40	10	150
D12*36*D12*75L*3T	12	36	12	75
D12*36*D12*100L*3T	12	36	12	100
D12*48*D12*150L*3T*3T	12	48	12	150
D16*48*D16*100L*3T*3T	16	48	16	100
D16*64*D16*150L*3T	16	64	16	150
D20*50*D20*100L*3T	20	50	20	100
D20*60*D20*150L*3T	20	60	20	150

YA-DCL3HL 高光高效五彩铝用铣刀 (3F)

YA-DCL3HL Coated Glossy Square Endmill For Copper And Aluminum (3F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*3T	1	3	4	50
D1.5*4.5*D4*50L*3T	1.5	4.5	4	50
D2*6*D4*50L*3T	2	6	4	50
D2.5*7.5*D4*50L*3T	2.5	7.5	4	50
D3*9*D3*50L*3T	3	9	3	50
D3*9*D4*50L*3T	3	9	4	50
D4*12*D4*50L*3T	4	12	4	50
D4*14*D4*75L*3T	4	14	4	75
D4*20*D4*100L*3T	4	20	4	100
D5*15*D6*50L*3T	5	15	6	50
D5*20*D6*100L*3T	5	20	6	100
D6*18*D6*50L*3T	6	18	6	50
D6*20*D6*50L*3T	6	20	6	50
D6*25*D6*100L*3T	6	25	6	100
D6*30*D6*75L*3T	6	30	6	75
D6*40*D6*100L*3T	6	40	6	100
D7*21*D8*60L*3T	7	21	8	60
D8*24*D8*60L*3T	8	24	8	60
D8*35*D8*100L*3T	8	35	8	100
D8*50*D8*150L*3T	8	50	8	150
D10*30*D10*75L*3T	10	30	10	75
D10*40*D10*100L*3T	10	40	10	100
D10*55*D10*150L*3T	10	55	10	150
D12*36*D12*75L*3T	12	36	12	75
D12*45*D12*100L*3T	12	45	12	100
D12*60*D12*150L*3T	12	60	12	150

YP552M 钨钢微小径立铣刀 (2F)

YP552M Micro Diameter End Mill (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.1*0.2*D4*50L*2T	φ0.1	0.2	4	50
D0.15*0.3*D4*50L*2T	φ0.15	0.3	4	50
D0.2*0.4*D4*50L*2T	φ0.2	0.4	4	50
D0.21*0.42*D4*50L*2T	φ0.21	0.42	4	50
D0.22*0.44*D4*50L*2T	φ0.22	0.44	4	50
D0.23*0.46*D4*50L*2T	φ0.23	0.46	4	50
D0.24*0.48*D4*50L*2T	φ0.24	0.48	4	50
D0.25*0.5*D4*50L*2T	φ0.25	0.5	4	50
D0.26*0.52*D4*50L*2T	φ0.26	0.52	4	50
D0.27*0.54*D4*50L*2T	φ0.27	0.54	4	50
D0.28*0.56*D4*50L*2T	φ0.28	0.56	4	50
D0.29*0.58*D4*50L*2T	φ0.29	0.58	4	50
D0.3*0.6*D4*50L*2T	φ0.30	0.6	4	50
D0.31*0.62*D4*50L*2T	φ0.31	0.62	4	50
D0.32*0.64*D4*50L*2T	φ0.32	0.64	4	50
D0.33*0.66*D4*50L*2T	φ0.33	0.66	4	50
D0.34*0.68*D4*50L*2T	φ0.34	0.68	4	50
D0.35*0.7*D4*50L*2T	φ0.35	0.7	4	50
D0.36*0.72*D4*50L*2T	φ0.36	0.72	4	50
D0.37*0.74*D4*50L*2T	φ0.37	0.74	4	50
D0.38*0.76*D4*50L*2T	φ0.38	0.76	4	50
D0.39*0.78*D4*50L*2T	φ0.39	0.78	4	50

YP552M 钨钢微小径铣刀 (2F)

YP552M Micro Diameter End Mill (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Cast Iron	不銹鋼 Stainless Steel	銅/鋁 Copper/ Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●	●	○					

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.4*0.8*D4*50L*2T	φ0.40	0.8	4	50
D0.41*0.82*D4*50L*2T	φ0.41	0.82	4	50
D0.42*0.84*D4*50L*2T	φ0.42	0.84	4	50
D0.43*0.86*D4*50L*2T	φ0.43	0.86	4	50
D0.44*0.88*D4*50L*2T	φ0.44	0.88	4	50
D0.45*0.9*D4*50L*2T	φ0.45	0.9	4	50
D0.46*0.92*D4*50L*2T	φ0.46	0.92	4	50
D0.47*0.94*D4*50L*2T	φ0.47	0.94	4	50
D0.48*0.96*D4*50L*2T	φ0.48	0.96	4	50
D0.49*0.98*D4*50L*2T	φ0.49	0.98	4	50
D0.5*1*D4*50L*2T	φ0.50	1	4	50
D0.51*1.02*D4*50L*2T	φ0.51	1.02	4	50
D0.52*1.04*D4*50L*2T	φ0.52	1.04	4	50
D0.53*1.06*D4*50L*2T	φ0.53	1.06	4	50
D0.54*1.08*D4*50L*2T	φ0.54	1.08	4	50
D0.55*1.1*D4*50L*2T	φ0.55	1.1	4	50
D0.56*1.12*D4*50L*2T	φ0.56	1.12	4	50
D0.57*1.14*D4*50L*2T	φ0.57	1.14	4	50
D0.58*1.16*D4*50L*2T	φ0.58	1.16	4	50
D0.59*1.18*D4*50L*2T	φ0.59	1.18	4	50
D0.6*1.2*D4*50L*2T	φ0.60	1.2	4	50
D0.61*1.22*D4*50L*2T	φ0.61	1.22	4	50
D0.62*1.24*D4*50L*2T	φ0.62	1.24	4	50
D0.63*1.26*D4*50L*2T	φ0.63	1.26	4	50
D0.64*1.28*D4*50L*2T	φ0.64	1.28	4	50
D0.65*1.3*D4*50L*2T	φ0.65	1.3	4	50

YP552M 钨钢微小径铣刀 (2F)

YP552M Micro Diameter End Mill (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼 / 合金鋼 Carbon Steel / Alloy Steel	合金鋼 / 工具 Alloy Steel / Tool Steel	合金鋼 / 工具 Alloy Steel / Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅 / 鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCD	SUS304		-		-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-		-	-
●	●	●	●	●	○					

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.66*1.32*D4*50L*2T	φ0.66	1.32	4	50
D0.67*1.34*D4*50L*2T	φ0.67	1.34	4	50
D0.68*1.36*D4*50L*2T	φ0.68	1.36	4	50
D0.69*1.38*D4*50L*2T	φ0.69	1.38	4	50
D0.7*1.4*D4*50L*2T	φ0.70	1.4	4	50
D0.71*1.42*D4*50L*2T	φ0.71	1.42	4	50
D0.72*1.44*D4*50L*2T	φ0.72	1.44	4	50
D0.73*1.46*D4*50L*2T	φ0.73	1.46	4	50
D0.74*1.48*D4*50L*2T	φ0.74	1.48	4	50
D0.75*1.5*D4*50L*2T	φ0.75	1.5	4	50
D0.76*1.52*D4*50L*2T	φ0.76	1.52	4	50
D0.77*1.54*D4*50L*2T	φ0.77	1.54	4	50
D0.78*1.56*D4*50L*2T	φ0.78	1.56	4	50
D0.79*1.58*D4*50L*2T	φ0.79	1.58	4	50
D0.8*1.6*D4*50L*2T	φ0.80	1.6	4	50
D0.81*1.62*D4*50L*2T	φ0.81	1.62	4	50
D0.82*1.64*D4*50L*2T	φ0.82	1.64	4	50
D0.83*1.66*D4*50L*2T	φ0.83	1.66	4	50
D0.84*1.68*D4*50L*2T	φ0.84	1.68	4	50
D0.85*1.7*D4*50L*2T	φ0.85	1.7	4	50
D0.86*1.72*D4*50L*2T	φ0.86	1.72	4	50
D0.87*1.74*D4*50L*2T	φ0.87	1.74	4	50
D0.88*1.76*D4*50L*2T	φ0.88	1.76	4	50
D0.89*1.78*D4*50L*2T	φ0.89	1.78	4	50
D0.9*1.8*D4*50L*2T	φ0.90	1.8	4	50
D0.95*1.9*D4*50L*2T	φ0.95	1.9	4	50

YP552D 钨钢标准铣刀 (2F)

YP552D Standard Size Square Shape Endmill (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		○					

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*2*D4*50L*2T	1	2	4	50
D1*3*D4*50L*2T	1	3	4	50
D1.5*3*D4*50L*2T	1.5	3	4	50
D1.5*4.5*D4*50L*2T	1.5	4.5	4	50
D2*4*D4*50L*2T	2	4	4	50
D2*6*D4*50L*2T	2	6	4	50
D2.5*5*D4*50L*2T	2.5	5	4	50
D2.5*7.5*D4*50L*2T	2.5	7.5	4	50
D3*6*D4*50L*2T	3	6	4	50
D3*9*D4*50L*2T	3	9	4	50
D4*8*D4*50L*2T	4	8	4	50
D4*10*D4*50L*2T	4	10	4	50
D4*12*D4*50L*2T	4	12	4	50
D5*15*D6*50L*2T	5	15	6	50
D6*12*D6*50L*2T	6	12	6	50
D6*18*D6*50L*2T	6	18	6	50
D8*20*D8*60L*2T	8	20	8	60
D10*25*D10*75L*2T	10	25	10	75

YP552D 钨钢非标小数点铣刀 (2F)

YP552D Decimal Point Size End Mill (2F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60		-	-	-	-	
●	●	●	●		○					

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1.1*3.3*D4*50L*2T	1.1	3.3	4	50
D1.2*3.6*D4*50L*2T	1.2	3.6	4	50
D1.3*3.9*D4*50L*2T	1.3	3.9	4	50
D1.4*4.2*D4*50L*2T	1.4	4.2	4	50
D1.6*4.8*D4*50L*2T	1.6	4.8	4	50
D1.7*5.1*D4*50L*2T	1.7	5.1	4	50
D1.8*5.4*D4*50L*2T	1.8	5.4	4	50
D1.9*5.7*D4*50L*2T	1.9	5.7	4	50
D2.1*6.3*D4*50L*2T	2.1	6.3	4	50
D2.2*6.6*D4*50L*2T	2.2	6.6	4	50
D2.3*6.9*D4*50L*2T	2.3	6.9	4	50
D2.4*7.2*D4*50L*2T	2.4	7.2	4	50
D2.6*7.8*D4*50L*2T	2.6	7.8	4	50
D2.7*8.1*D4*50L*2T	2.7	8.1	4	50
D2.8*8.4*D4*50L*2T	2.8	8.4	4	50
D2.9*8.7*D4*50L*2T	2.9	8.7	4	50
D3.1*9.3*D4*50L*2T	3.1	9.3	4	50
D3.2*9.6*D4*50L*2T	3.2	9.6	4	50
D3.3*9.9*D4*50L*2T	3.3	9.9	4	50
D3.4*10.2*D4*50L*2T	3.4	10.2	4	50
D3.5*10.5*D4*50L*2T	3.5	10.5	4	50
D3.6*10.8*D4*50L*2T	3.6	10.8	4	50
D3.7*11.1*D4*50L*2T	3.7	11.1	4	50
D3.8*11.4*D4*50L*2T	3.8	11.4	4	50
D3.9*11.7*D4*50L*2T	3.9	11.7	4	50

YP554A 钨钢标准铣刀 (4F)
YP554A Standard Size Square Shape Endmill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCO	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*4T	1	3	4	50
D1*3*D4*75L*4T	1	3	4	75
D1.5*4*D4*50L*4T	1.5	4	4	50
D1.5*4.5*D4*75L*4T	1.5	4.5	4	75
D2*5*D4*50L*4T	2	5	4	50
D2*6*D4*75L*4T	2	6	4	75
D2.5*6.5*D4*50L*4T	2.5	6.5	4	50
D2.5*7.5*D4*75L*4T	2.5	7.5	4	75
D3*9*D3*50L*4T	3	9	3	50
D3*9*D4*50L*4T	3	9	4	50
D3*9*D4*75L*4T	3	9	4	75
D4*12*D4*50L*4T	4	12	4	50
D4*20*D4*100L*4T	4	20	4	100
D4*20*D4*75L*4T	4	20	4	75
D5*12.5*D5*50L*4T	5	12.5	5	50
D5*12.5*D6*50L*4T	5	12.5	6	50
D5*30*D6*100L*4T	5	30	6	100
D6*15*D6*50L*4T	6	15	6	50
D6*20*D6*75L*4T	6	20	6	75
D6*30*D6*100L*4T	6	30	6	100
D8*20*D8*60L*4T	8	20	8	60
D8*20*D8*75L*4T	8	20	8	75
D8*32*D8*150L*4T	8	32	8	150
D8*40*D8*100L*4T	8	40	8	100
D10*25*D10*75L*4T	10	25	10	75
D10*40*D10*100L*4T	10	40	10	100
D10*45*D10*150L*4T	10	45	10	150
D12*30*D12*75L*4T	12	30	12	75
D12*45*D12*100L*4T	12	45	12	100
D12*60*D12*150L*4T	12	60	12	150
D16*50L*D16*100L*4T	16	50	16	100
D16*70*D16*150L*4T	16	70	16	150

814F 高效钨钢铣刀 (4F)
814F High Efficiency Tungsten Steel Endmill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCO	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		●	●		○	○	○

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*3*D4*50L*4T	1	3	4	50
D1.5*5*D4*50L*4T	1.5	5	4	50
D2*6*D4*50L*4T	2	6	4	50
D2.5*8*D4*50L*4T	2.5	8	4	50
D3*8*D4*50L*4T	3	8	4	50
D4*11*D4*50L*4T	4	11	4	50
D3*8*D6*50L*4T	3	8	6	50
D4*11*D6*50L*4T	4	11	6	50
D5*13*D6*50L*4T	5	13	6	50
D6*16*D6*50L*4T	6	16	6	50
D8*20*D8*60L*4T	8	20	8	60
D10*25*D10*75L*4T	10	25	10	75
D12*30*D12*75L*4T	12	30	12	75
D14*32*D14*90L*4T	14	32	14	90
D16*40*D16*100L*4T	16	40	16	100
D18*40*D18*100L*4T	18	40	18	100
D20*40*D20*100L*4T	20	40	20	100

824F 高性能钨钢铣刀 (4F)
824F High Performance Tungsten Steel Endmill (4F)




技术参数/ Technology Parameters



被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper/ Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-	-
●	●	●	●		●	●		○	○	○

规格	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D3*9*D6*50L*4T	3	9	6	50
D4*12*D6*50L*4T	4	12	6	50
D5*15*D6*50L*4T	5	15	6	50
D6*18*D6*50L*4T	6	18	6	50
D8*24*D8*60L*4T	8	24	8	60
D10*30*D10*75L*4T	10	30	10	75
D12*36*D12*75L*4T	12	36	12	75
D16*50*D16*100L*4T	16	48	16	100
D20*60*D20*100L*4T	20	60	20	120

834F 高效钨钢铣刀C角 (4F)
834F High Efficiency Tungsten Steel Endmill Chamfer (4F)





技术参数/ Technology Parameters




被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper/ Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D4c0.1*11*D4*50L*4T	4	11	4	50
D5c0.2*14*D6*50L*4T	5	14	6	50
D6c0.2*15*D6*50L*4T	6	15	6	50
D8c0.3*20*D8*60L*4T	8	20	8	60
D10c0.4*23*D10*75L*4T	10	23	10	75
D12c0.5*28*D12*75L*4T	12	28	12	75

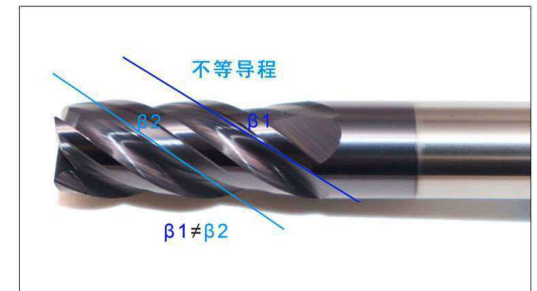

YP554LA 加长刃铣刀不带避空 (4F)

YP554LA Long Flutes Endmill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Cast Iron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FC	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1*4*D4*50L*4T	1	4	4	50
D1*5*D4*50L*4T		5	4	50
D1*6*D4*50L*4T		6	4	50
D1*8*D4*50L*4T		8	4	50
D1.2*6*D4*50L*4T	1.2	6	4	50
D1.2*8*D4*50L*4T		8	4	50
D1.3*6*D4*50L*4T	1.3	6	4	50
D1.3*8*D4*50L*4T		8	4	50
D1.4*6*D4*50L*4T	1.4	6	4	50
D1.4*8*D4*50L*4T		8	4	50
D1.4*10*D4*50L*4T	1.4	10	4	50
D1.5*6*D4*50L*4T	1.5	6	4	50
D1.5*8*D4*50L*4T		8	4	50
D1.5*10*D4*50L*4T	1.5	10	4	50
D1.6*6*D4*50L*4T	1.6	6	4	50
D1.6*8*D4*50L*4T		8	4	50
D1.6*10*D4*50L*4T	1.6	10	4	50
D1.8*6*D4*50L*4T	1.8	6	4	50
D1.8*8*D4*50L*4T		8	4	50
D1.8*10*D4*50L*4T	1.8	10	4	50
D2*8*D4*50L*4T	2	8	4	50
D2*10*D4*50L*4T		10	4	50
D2*12*D4*50L*4T	2	12	4	50
D2.5*10*D4*50L*4T		10	4	50
D2.5*12*D4*50L*4T	2.5	12	4	50
D2.5*15*D4*50L*4T		15	4	50
D3*12*D4*50L*4T	3	12	4	50
D3*14*D4*50L*4T		14	4	50
D3*16*D4*50L*4T	3	16	4	50
D4*20*D4*50L*4T		20	4	50

YP554D 钨钢非标小数点铣刀 (4F)

YP554D Decimal Point Size Endmill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Cast Iron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FC	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D1.05*3.15*D4*50L*4T	1.05	3.15	4	50
D1.1*3.3*D4*50L*4T	1.1	3.3	4	50
D1.15*3.45*D4*50L*4T	1.15	3.45	4	50
D1.2*3.6*D4*50L*4T	1.2	3.6	4	50
D1.25*3.75*D4*50L*4T	1.25	3.75	4	50
D1.3*3.9*D4*50L*4T	1.3	3.9	4	50
D1.35*4.05*D4*50L*4T	1.35	4.05	4	50
D1.4*4.2*D4*50L*4T	1.4	4.2	4	50
D1.45*4.35*D4*50L*4T	1.45	4.35	4	50
D1.55*4.65*D4*50L*4T	1.55	4.65	4	50
D1.6*4.8*D4*50L*4T	1.6	4.8	4	50
D1.65*4.95*D4*50L*4T	1.65	4.95	4	50
D1.7*5.1*D4*50L*4T	1.7	5.1	4	50
D1.75*5.25*D4*50L*4T	1.75	5.25	4	50
D1.8*5.4*D4*50L*4T	1.8	5.4	4	50
D1.85*5.55*D4*50L*4T	1.85	5.55	4	50
D1.9*5.7*D4*50L*4T	1.9	5.7	4	50
D.95*5.85*D4*50L*4T	1.95	5.85	4	50
D2.05*6.15*D4*50L*4T	2.05	6.15	4	50
D2.1*6.3*D4*50L*4T	2.1	6.3	4	50
D2.15*6.45*D4*50L*4T	2.15	6.45	4	50
D2.2*6.6*D4*50L*4T	2.2	6.6	4	50
D2.25*6.75*D4*50L*4T	2.25	6.75	4	50
D2.3*6.9*D4*50L*4T	2.3	6.9	4	50
D2.35*7.05*D4*50L*4T	2.35	7.05	4	50
D2.4*7.2*D4*50L*4T	2.4	7.2	4	50
D2.45*7.35*D4*50L*4T	2.45	7.35	4	50
D2.55*7.65*D4*50L*4T	2.55	7.65	4	50
D2.6*7.8*D4*50L*4T	2.6	7.8	4	50

YP554D 钨钢非标小数点铣刀 (4F)

YP554D Decimal Point Size End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FCI/CD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D2.7*8.1*D4*50L*4T	2.7	8.1	4	50
D2.75*8.25*D4*50L*4T	2.75	8.25	4	50
D2.8*8.4*D4*50L*4T	2.8	8.4	4	50
D2.85*8.55*D4*50L*4T	2.85	8.55	4	50
D2.9*8.7*D4*50L*4T	2.9	8.7	4	50
D2.95*8.85*D4*50L*4T	2.95	8.85	4	50
D3.05*9.15*D4*50L*4T	3.05	9.15	4	50
D3.1*9.3*D4*50L*4T	3.1	9.3	4	50
D3.15*9.45*D4*50L*4T	3.15	9.45	4	50
D3.2*9.6*D4*50L*4T	3.2	9.6	4	50
D3.25*9.75*D4*50L*4T	3.25	9.75	4	50
D3.3*9.9*D4*50L*4T	3.3	9.9	4	50
D3.35*10.05*D4*50L*4T	3.35	10.05	4	50
D3.4*10.2*D4*50L*4T	3.4	10.2	4	50
D3.45*10.35*D4*50L*4T	3.45	10.35	4	50
D3.5*10.5*D4*50L*4T	3.5	10.5	4	50
D3.55*10.65*D4*50L*4T	3.55	10.65	4	50
D3.6*10.8*D4*50L*4T	3.6	10.8	4	50
D3.65*10.95*D4*50L*4T	3.65	10.95	4	50
D3.7*11.1*D4*50L*4T	3.7	11.1	4	50
D3.75*11.25*D4*50L*4T	3.75	11.25	4	50
D3.8*11.4*D4*50L*4T	3.8	11.4	4	50
D3.85*11.55*D4*50L*4T	3.85	11.55	4	50
D3.9*11.7*D4*50L*4T	3.9	11.7	4	50
D3.95*11.85*D4*50L*4T	3.95	11.85	4	50
D4.1*12.3*D6*50L*4T	4.1	12.3	6	50
D4.2*12.6*D6*50L*4T	4.2	12.6	6	50
D4.3*12.9*D6*50L*4T	4.3	12.9	6	50
D4.4*13.2*D6*50L*4T	4.4	13.2	6	50
D4.5*13.5*D6*50L*4T	4.5	13.5	6	50
D4.6*13.8*D6*50L*4T	4.6	13.8	6	50

YP554D 钨钢非标小数点铣刀 (4F)

YP554D Decimal Point Size End Mill (4F)



技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FCI/CD	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D4.7*14.1*D6*50L*4T	4.7	14.1	6	50
D4.8*14.4*D6*50L*4T	4.8	14.4	6	50
D4.9*14.7*D6*50L*4T	4.9	14.7	6	50
D5.1*15.3*D6*50L*4T	5.1	15.3	6	50
D5.2*15.6*D6*50L*4T	5.2	15.6	6	50
D5.3*15.9*D6*50L*4T	5.3	15.9	6	50
D5.4*16.2*D6*50L*4T	5.4	16.2	6	50
D5.5*16.5*D6*50L*4T	5.5	16.5	6	50
D5.6*16.8*D6*50L*4T	5.6	16.8	6	50
D5.7*17.1*D6*50L*4T	5.7	17.1	6	50
D5.8*17.4*D6*50L*4T	5.8	17.4	6	50
D5.9*17.7*D6*50L*4T	5.9	17.7	6	50
D6.1*18.3*D8*60L*4T	6.1	18.3	8	60
D6.2*18.6*D8*60L*4T	6.2	18.6	8	60
D6.3*18.9*D8*60L*4T	6.3	18.9	8	60
D6.4*19.2*D8*60L*4T	6.4	19.2	8	60
D6.5*19.5*D8*60L*4T	6.5	19.5	8	60
D6.6*19.8*D8*60L*4T	6.6	19.8	8	60
D6.7*20.1*D8*60L*4T	6.7	20.1	8	60
D6.8*20.4*D8*60L*4T	6.8	20.4	8	60
D6.9*20.7*D8*60L*4T	6.9	20.7	8	60
D7*21*D8*60L*4T	7	21	8	60
D7.1*21.3*D8*60L*4T	7.1	21.3	8	60
D7.2*21.6*D8*60L*4T	7.2	21.6	8	60
D7.3*21.9*D8*60L*4T	7.3	21.9	8	60
D7.4*22.2*D8*60L*4T	7.4	22.2	8	60
D7.5*22.5*D8*60L*4T	7.5	22.5	8	60
D7.6*22.8*D8*60L*4T	7.6	22.8	8	60
D7.7*23.1*D8*60L*4T	7.7	23.1	8	60
D7.8*23.4*D8*60L*4T	7.8	23.4	8	60
D7.9*23.7*D8*60L*4T	7.9	23.7	8	60

平底铣刀

长颈球刀

球头铣刀

长颈球刀

圆鼻铣刀

长颈圆鼻

螺纹铣刀

钻头


螺纹刀头

抗震刀杆

刀粒

刀粒

YP554D 钨钢非标小数点铣刀 (4F)
YP554D Decimal Point Size Endmill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	●	○			

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D8.1*24.3*D10*75L*4T	8.1	24.3	10	75
D8.2*24.6*D10*75L*4T	8.2	24.6	10	75
D8.3*24.9*D10*75L*4T	8.3	24.9	10	75
D8.4*25.2*D10*75L*4T	8.4	25.2	10	75
D8.5*25.5*D10*75L*4T	8.5	25.5	10	75
D8.6*25.8*D10*75L*4T	8.6	25.8	10	75
D8.7*26.1*D10*75L*4T	8.7	26.1	10	75
D8.8*26.4*D10*75L*4T	8.8	26.4	10	75
D8.9*26.7*D10*75L*4T	8.9	26.7	10	75
D10.1*30.3*D12*75L*4T	10.1	30.3	12	75
D10.2*30.6*D12*75L*4T	10.2	30.6	12	75
D10.3*30.9*D12*75L*4T	10.3	30.9	12	75
D10.4*31.2*D12*75L*4T	10.4	31.2	12	75
D10.5*31.5*D12*75L*4T	10.5	31.5	12	75
D10.6*31.8*D12*75L*4T	10.6	31.8	12	75
D10.7*32.1*D12*75L*4T	10.7	32.1	12	75
D10.8*32.4*D12*75L*4T	10.8	32.4	12	75
D10.9*32.7*D12*75L*4T	10.9	32.7	12	75
D11*33*D12*75L*4T	11	33	12	75
D11.1*33.3*D12*75L*4T	11.1	33.3	12	75
D11.2*33.6*D12*75L*4T	11.2	33.6	12	75
D11.3*33.9*D12*75L*4T	11.3	33.9	12	75
D11.4*34.2*D12*75L*4T	11.4	34.2	12	75
D11.5*34.5*D12*75L*4T	11.5	34.5	12	75
D11.6*34.8*D12*75L*4T	11.6	34.8	12	75
D11.7*35.1*D12*75L*4T	11.7	35.1	12	75
D11.8*35.4*D12*75L*4T	11.8	35.4	12	75
D11.9*35.7*D12*75L*4T	11.9	35.7	12	75

YP554 T型刀 (4F)
YP554 T Type End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	●	○			

规格 (Specification)	外径 (CED)	厚度 (THK)	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D2*0.5*d1*3*D4*50L	φ2.0	0.5	1	3	4	50
D2*1*d1*3*D4*50L		1				
D2*1.5*d1*3*D4*50L		1.5				
D2*2*d1*3*D4*50L		2				
D2*2.5*d1*3*D4*50L		2.5				
D2*3*d1*3*D4*50L		3				
D2*3.5*d1*3*D4*50L		3.5				
D2*4*d1*3*D4*50L		4				
D3*0.3*d1.5*4*D4*50L	φ3.0	0.3	1.5	4	4	50
D3*0.4*d1.5*4*D4*50L		0.4				
D3*0.5*d1.5*4*D4*50L		0.5				
D3*0.6*d1.5*4*D4*50L		0.6				
D3*0.7*d1.5*4*D4*50L		0.7				
D3*0.8*d1.5*4*D4*50L		0.8				
D3*0.9*d1.5*4*D4*50L		0.9				
D3*1*d1.5*4*D4*50L		1				
D3*1.1*d1.5*4*D4*50L		1.1				
D3*1.2*d1.5*4*D4*50L		1.2				
D3*1.3*d1.5*4*D4*50L		1.3				
D3*1.4*d1.5*4*D4*50L		1.4				
D3*1.5*d1.5*4*D4*50L		1.5				
D3*1.6*d1.5*4*D4*50L		1.6				
D3*1.7*d1.5*4*D4*50L		1.7				
D3*1.8*d1.5*4*D4*50L		1.8				
D3*1.9*d1.5*4*D4*50L		1.9				
D3*2*d1.5*4*D4*50L		2				
D3*2.1*d1.5*4*D4*50L		2.1				
D3*2.2*d1.5*4*D4*50L		2.2				
D3*2.3*d1.5*4*D4*50L		2.3				
D3*2.4*d1.5*4*D4*50L		2.4				
D3*2.5*d1.5*4*D4*50L		2.5				
D3*2.6*d1.5*4*D4*50L		2.6				
D3*2.7*d1.5*4*D4*50L		2.7				
D3*2.8*d1.5*4*D4*50L		2.8				
D3*2.9*d1.5*4*D4*50L		2.9				
D3*3*d1.5*4*D4*50L		3				
D3*3.1*d1.5*4*D4*50L		3.1				
D3*3.2*d1.5*4*D4*50L		3.2				
D3*3.3*d1.5*4*D4*50L		3.3				
D3*3.4*d1.5*4*D4*50L		3.4				

平底铣刀
长颈球头
球头铣刀
长颈球头
圆鼻铣刀
长颈圆鼻
螺纹铣刀
钻头
螺纹刀头
抗震刀杆
刀粒

 YP554 T型刀 (4F)
YP554 T Type End Mill (4F)

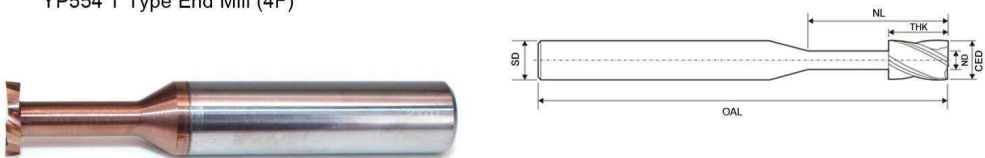


技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	硬質鋼 Hardened Steel	硬質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper/ Aluminum	鈦合金 Titanium Alloy	鎳 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	○	-	-	-	-
●	●	●	●	●	●	○				

规格 (Specification)	外径 (CED)	厚度 (THK)	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D4*3.5*d2*8*D4*50L	φ4.0	3.5	2	8	4	50
D4*3.6*d2*8*D4*50L		3.6				
D4*3.7*d2*8*D4*50L		3.7				
D4*3.8*d2*8*D4*50L		3.8				
D4*3.9*d2*8*D4*50L		3.9				
D4*4*d2*8*D4*50L		4				
D4*4.5*d2*8*D4*50L		4.5				
D4*5*d2*8*D4*50L		5				
D4*5.5*d2*8*D4*50L		5.5				
D4*6*d2*8*D4*50L		6				
D6*0.3*d3*10*D6*50L	φ6.0	0.3	3	10	6	50
D6*0.4*d3*10*D6*50L		0.4				
D6*0.5*d3*10*D6*50L		0.5				
D6*0.6*d3*10*D6*50L		0.6				
D6*0.7*d3*10*D6*50L		0.7				
D6*0.8*d3*10*D6*50L		0.8				
D6*0.9*d3*10*D6*50L		0.9				
D6*1*d3*10*D6*50L		1				
D6*1.1*d3*10*D6*50L		1.1				
D6*1.2*d3*10*D6*50L		1.2				
D6*1.3*d3*10*D6*50L		1.3				
D6*1.4*d3*10*D6*50L		1.4				
D6*1.5*d3*10*D6*50L		1.5				
D6*1.6*d3*10*D6*50L		1.6				
D6*1.7*d3*10*D6*50L		1.7				
D6*1.8*d3*10*D6*50L		1.8				
D6*1.9*d3*10*D6*50L		1.9				
D6*2*d3*10*D6*50L		2				
D6*2.1*d3*10*D6*50L		2.1				
D6*2.2*d3*10*D6*50L		2.2				
D6*2.3*d3*10*D6*50L		2.3				
D6*2.4*d3*10*D6*50L		2.4				
D6*2.5*d3*10*D6*50L		2.5				
D6*2.6*d3*10*D6*50L		2.6				
D6*2.7*d3*10*D6*50L		2.7				
D6*2.8*d3*10*D6*50L		2.8				
D6*2.9*d3*10*D6*50L		2.9				
D6*3*d3*10*D6*50L		3				

YP554 T型刀 (4F)
YP554 T Type End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCDD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	●	○			

规格 (Specification)	外径 (CED)	厚度 (THK)	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D6*3.1*d3*10*D6*50L	φ6.0	3.1	3	10	6	50
D6*3.2*d3*10*D6*50L		3.2				
D6*3.3*d3*10*D6*50L		3.3				
D6*3.4*d3*10*D6*50L		3.4				
D6*3.5*d3*10*D6*50L		3.5				
D6*3.6*d3*10*D6*50L		3.6				
D6*3.7*d3*10*D6*50L		3.7				
D6*3.8*d3*10*D6*50L		3.8				
D6*3.9*d3*10*D6*50L		3.9				
D6*4*d3*10*D6*50L		4				
D6*4.5*d3*10*D6*50L	φ8.0	4.5	4	12	8	50
D6*5*d3*10*D6*50L		5				
D6*5.5*d3*10*D6*50L		5.5				
D6*6*d3*10*D6*50L		6				
D8*0.3*d4*12*D8*50L		0.3				
D8*0.4*d4*12*D8*50L		0.4				
D8*0.5*d4*12*D8*50L		0.5				
D8*0.6*d4*12*D8*50L		0.6				
D8*0.7*d4*12*D8*50L		0.7				
D8*0.8*d4*12*D8*50L		0.8				
D8*0.9*d4*12*D8*50L		0.9				
D8*1*d4*12*D8*50L		1				
D8*1.1*d4*12*D8*50L		1.1				
D8*1.2*d4*12*D8*50L		1.2				
D8*1.3*d4*12*D8*50L		1.3				
D8*1.4*d4*12*D8*50L		1.4				
D8*1.5*d4*12*D8*50L		1.5				
D8*1.6*d4*12*D8*50L		1.6				
D8*1.7*d4*12*D8*50L		1.7				
D8*1.8*d4*12*D8*50L		1.8				
D8*1.9*d4*12*D8*50L		1.9				
D8*2*d4*12*D8*50L	φ10.0	2	5	15	10	60
D8*2.1*d4*12*D8*50L		2.1				
D8*2.2*d4*12*D8*50L		2.2				
D8*2.3*d4*12*D8*50L		2.3				
D8*2.4*d4*12*D8*50L		2.4				
D8*2.5*d4*12*D8*50L		2.5				
D8*2.6*d4*12*D8*50L		2.6				

YP554 T型刀 (4F)
YP554 T Type End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCDD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	●	○			

规格 (Specification)	外径 (CED)	厚度 (THK)	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D8*2.7*d4*12*D8*50L	φ8.0	2.7	4	12	8	50
D8*2.8*d4*12*D8*50L		2.8				
D8*2.9*d4*12*D8*50L		2.9				
D8*3*d4*12*D8*50L		3				
D8*3.1*d4*12*D8*50L		3.1				
D8*3.2*d4*12*D8*50L		3.2				
D8*3.3*d4*12*D8*50L		3.3				
D8*3.4*d4*12*D8*50L		3.4				
D8*3.5*d4*12*D8*50L		3.5				
D8*3.6*d4*12*D8*50L		3.6				
D8*3.7*d4*12*D8*50L	φ10.0	3.7	5	15	10	60
D8*3.8*d4*12*D8*50L		3.8				
D8*3.9*d4*12*D8*50L		3.9				
D8*4*d4*12*D8*50L		4				
D8*4.5*d4*12*D8*50L		4.5				
D8*5*d4*12*D8*50L		5				
D8*5.5*d4*12*D8*50L		5.5				
D8*6*d4*12*D8*50L		6				
D10*0.3*d5*15*D10*60L		0.3				
D10*0.4*d5*15*D10*60L		0.4				
D10*0.5*d5*15*D10*60L	φ12.0	0.5	6	18	12	70
D10*0.6*d5*15*D10*60L		0.6				
D10*0.7*d5*15*D10*60L		0.7				
D10*0.8*d5*15*D10*60L		0.8				
D10*0.9*d5*15*D10*60L		0.9				
D10*1*d5*15*D10*60L		1				
D10*1.1*d5*15*D10*60L		1.1				
D10*1.2*d5*15*D10*60L		1.2				
D10*1.3*d5*15*D10*60L		1.3				
D10*1.4*d5*15*D10*60L		1.4				
D10*1.5*d5*15*D10*60L	φ14.0	1.5	7	21	14	80
D10*1.6*d5*15*D10*60L		1.6				
D10*1.7*d5*15*D10*60L		1.7				
D10*1.8*d5*15*D10*60L		1.8				
D10*1.9*d5*15*D10*60L		1.9				
D10*2*d5*15*D10*60L		2				
D10*2.1*d5*15*D10*60L		2.1				
D10*2.2*d5*15*D10*60L		2.2				

YP554 T型刀 (4F)

YP554 T Type End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-	-
●	●	●	●		●	○				

规格 (Specification)	外径 (CED)	厚度 (THK)	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D10*2.3*d5*15*D10*60L	φ10.0	2.3	5	15	10	60
D10*2.4*d5*15*D10*60L		2.4				
D10*2.5*d5*15*D10*60L		2.5				
D10*2.6*d5*15*D10*60L		2.6				
D10*2.7*d5*15*D10*60L		2.7				
D10*2.8*d5*15*D10*60L		2.8				
D10*2.9*d5*15*D10*60L		2.9				
D10*3*d5*15*D10*60L		3				
D10*3.1*d5*15*D10*60L		3.1				
D10*3.2*d5*15*D10*60L		3.2				
D10*3.3*d5*15*D10*60L		3.3				
D10*3.4*d5*15*D10*60L		3.4				
D10*3.5*d5*15*D10*60L		3.5				
D10*3.6*d5*15*D10*60L		3.6				
D10*3.7*d5*15*D10*60L		3.7				
D10*3.8*d5*15*D10*60L		3.8				
D10*3.9*d5*15*D10*60L		3.9				
D10*4*d5*15*D10*60L		4				
D10*4.5*d5*15*D10*60L		4.5				
D10*5*d5*15*D10*60L		5				
D10*5.5*d5*15*D10*60L		5.5				
D10*6*d5*15*D10*60L		6				
D10*6.5*d5*15*D10*60L		6.5				
D10*7*d5*15*D10*60L		7				
D10*7.5*d5*15*D10*60L		7.5				
D10*8*d5*15*D10*60L		8				
D12*0.5*d6*15*D12*60L	φ12.0	0.5	6	15	12	60
D12*0.6*d6*15*D12*60L		0.6				
D12*0.7*d6*15*D12*60L		0.7				
D12*0.8*d6*15*D12*60L		0.8				
D12*0.9*d6*15*D12*60L		0.9				
D12*1*d6*15*D12*60L		1				
D12*1.1*d6*15*D12*60L		1.1				
D12*1.2*d6*15*D12*60L		1.2				
D12*1.3*d6*15*D12*60L		1.3				
D12*1.4*d6*15*D12*60L		1.4				
D12*1.5*d6*15*D12*60L		1.5				
D12*1.6*d6*15*D12*60L		1.6				

YP554 T型刀 (4F)

YP554 T Type End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCD	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-	-
●	●	●	●	●	●	○				

规格 (Specification)	外径 (CED)	厚度 (THK)	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D12*1.7*d6*15*D12*60L	φ12.0	1.7	6	15	12	60
D12*1.8*d6*15*D12*60L		1.8				
D12*1.9*d6*15*D12*60L		1.9				
D12*2*d6*15*D12*60L		2				
D12*2.1*d6*15*D12*60L		2.1				
D12*2.2*d6*15*D12*60L		2.2				
D12*2.3*d6*15*D12*60L		2.3				
D12*2.4*d6*15*D12*60L		2.4				
D12*2.5*d6*15*D12*60L		2.5				
D12*2.6*d6*15*D12*60L		2.6				
D12*2.7*d6*15*D12*60L		2.7				
D12*2.8*d6*15*D12*60L		2.8				
D12*2.9*d6*15*D12*60L		2.9				
D12*3*d6*15*D12*60L		3				
D12*3.1*d6*15*D12*60L		3.1				
D12*3.2*d6*15*D12*60L		3.2				
D12*3.3*d6*15*D12*60L		3.3				
D12*3.4*d6*15*D12*60L		3.4				
D12*3.5*d6*15*D12*60L		3.5				
D12*3.6*d6*15*D12*60L		3.6				
D12*3.7*d6*15*D12*60L		3.7				
D12*3.8*d6*15*D12*60L		3.8				
D12*3.9*d6*15*D12*60L		3.9				
D12*4*d6*15*D12*60L		4				
D12*4.5*d6*15*D12*60L		4.5				
D12*5*d6*15*D12*60L		5				
D12*5.5*d6*15*D12*60L		5.5				
D12*6*d6*15*D12*60L		6				
D12*6.5*d6*15*D12*60L		6.5				
D12*7*d6*15*D12*60L		7				
D12*7.5*d6*15*D12*60L		7.5				
D12*8*d6*15*D12*60L		8				
D12*10*d6*15*D12*60L		10				
D12*12*d6*15*D12*60L		12				

平底铣刀
长颈铣刀
球头铣刀
长颈球头
圆鼻铣刀
长颈圆鼻
螺纹铣刀
钻头
螺纹刀头
抗震刀杆
刀粒

YP554R 内R刀 (4F)
YP554R Inner R End Mill (4F)



技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCd	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	●	○			

规格 (Specification)	内R刀 (R)	头部直径 (CED)	柄径 (SD)	总长 (OAL)
R0.2*d3.6*D4*50L	R0.2	3.6	4	50
R0.5*d3.5*D4*50L	R0.25	3.5	4	50
R0.3*d3.4*D4*50L	R0.3	3.4	4	50
R0.4*d3.2*D4*50L	R0.4	3.2	4	50
R0.5*d3*D4*50L	R0.5	3	4	50
R0.75*d2.5*D4*50L	R0.75	2.5	4	50
R1*d2*D4*50L	R1	2	4	50
R1.25*d1.5*D4*50L	R1.25	1.5	4	50
R1.5*d1*D4*50L	R1.5	1	4	50
R1.5*d3*D6*50L	R1.5	3	6	50
R1.75*d2.5*D6*50L	R1.75	2.5	6	50
R2*d2*D6*50L	R2	2	6	50
R2.25*d3.5*D8*50L	R2.25	3.5	8	50
R2.5*1*D6*50L	R2.5	1	6	50
R2.5*d3*D8*50L	R2.5	3	8	50
R3*d2*D8*50L	R3	2	8	50
R4*d2*D10*60L	R4	2	10	60
R5*d2*D12*60L	R5	2	12	60

YP554T 燕尾刀 (4F)
554P Dovetail End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用 ● / ○ 適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCd	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	●	○			

规格 (Specification)	刃径 (CED)	单边角度 (A)	刃高	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D1*60°*0.43*d0.5*2.5*D4*50L	1	60°	0.43	0.5	2.5	4	50
D1.5*60°*0.65*d0.75*3.2*D4*50L	1.5		0.65	0.75	3.2	4	50
D2*60°*0.87*d1*4*D4*50L	2		0.87	1	4	4	50
D2.5*60°*1.1*d1.25*5*D4*50L	2.5		1.1	1.25	5	4	50
D3*60°*1.3*d1.5*7*D4*50L	3		1.3	1.5	7	4	50
D4*60°*1.73*d2*8*D4*50L	4		1.73	2	8	4	50
D5*60°*2.17*d2.5*10*D6*50L	5		2.17	2.5	10	6	50
D6*60°*2.6*d3*11*D6*50L	6		2.6	3	11	6	50
D8*60°*3.46*d4*14*D8*50L	8		3.46	4	14	8	50
D10*60°*4.33*d5*20*D10*60L	10		4.33	5	20	10	60
D12*60°*5.2*d6*21*D12*60L	12		5.2	6	21	12	60
D0.8*45°*0.2*d0.4*2*D4*50L	0.8	45°	0.2	0.4	2	4	50
D0.9*45°*0.25*d0.4*2*D4*50L	0.9		0.25	0.4	2	4	50
D1*45°*0.25*d0.5*2.5*D4*50L	1		0.25	0.5	2.5	4	50
D1.1*45°*0.25*d0.6*2.5*D4*50L	1.1		0.25	0.6	2.5	4	50
D1.2*45°*0.3*d0.6*2.5*D4*50L	1.2		0.3	0.6	2.5	4	50
D1.3*45°*0.35*d0.6*2.5*D4*50L	1.3		0.35	0.6	2.5	4	50
D1.4*45°*0.4*d0.6*2.5*D4*50L	1.4		0.4	0.6	2.5	4	50
D1.5*45°*0.38*d0.75*2.8*D4*50L	1.5		0.38	0.75	2.8	4	50
D1.6*45°*0.45*d0.7*3*D4*50L	1.6		0.45	0.7	3	4	50
D1.7*45°*0.5*d0.7*3*D4*50L	1.7		0.5	0.7	3	4	50
D1.8*45°*0.55*d0.7*3*D4*50L	1.8		0.55	0.7	3	4	50
D1.9*45°*0.6*d0.7*3*D4*50L	1.9		0.6	0.7	3	4	50
D2*45°*0.5*d1*3.5*D4*50L	2		0.5	1	3.5	4	50

YP554T 燕尾刀 (4F)
YP554T Dovetail End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)							
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Cast Iron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-
●	●	●	●		●	○	

规格 (Specification)	刃径 (CED)	单边角度 (A)	刃高	颈径 (ND)	颈长 (NL)	柄径 (SD)	总长 (OAL)
D2.1*45°*0.55*d1*4*D4*50L	2.1	45°	0.55	1	4	4	50
D2.2*45°*1.0*d1*4*D4*50L	2.2		1.0	1	4	4	50
D2.3*45°*0.65*d1*4*D4*50L	2.3		0.65	1	4	4	50
D2.4*45°*0.7*d1*4*D4*50L	2.4		0.7	1	4	4	50
D2.5*45°*0.63*d1.25*4.7*D4*50L	2.5		0.63	1.25	4.7	4	50
D2.6*45°*0.7*d1.2*5*D4*50L	2.6		0.7	1.2	5	4	50
D2.7*45°*0.75*d1.2*5*D4*50L	2.7		0.75	1.2	5	4	50
D2.8*45°*0.8*d1.2*5*D4*50L	2.8		0.8	1.2	5	4	50
D2.9*45°*0.85*d1.2*5*D4*50L	2.9		0.85	1.2	5	4	50
D3*45°*0.75*d1.5*6*D4*50L	3		0.75	1.5	6	4	50
D3.1*45°*0.8*d1.5*6*D4*50L	3.1		0.8	1.5	6	4	50
D3.2*45°*0.85*d1.5*6*D4*50L	3.2		0.85	1.5	6	4	50
D3.3*45°*0.9*d1.5*6*D4*50L	3.3		0.9	1.5	6	4	50
D3.4*45°*0.95*d1.5*6*D4*50L	3.4		0.95	1.5	6	4	50
D3.5*45°*1*d1.5*6*D4*50L	3.5		1	1.5	6	4	50
D3.6*45°*1.05*d1.5*6*D4*50L	3.6		1.05	1.5	6	4	50
D3.7*45°*1.1*d1.5*6*D4*50L	3.7		1.1	1.5	6	4	50
D3.8*45°*1.15*d1.5*6*D4*50L	3.8		1.15	1.5	6	4	50
D3.9*45°*1.2*d1.5*6*D4*50L	3.9		1.2	1.5	6	4	50
D4*45°*1.1*d2*7*D4*50L	4		1	2	7	4	50
D5*45°*1.25*d2.5*9*D6*50L	5		1.25	2.5	9	6	50
D6*45°*1.5*d3*9.5*D6*50L	6		1.5	3	9.5	6	50
D8*45°*2*d4*12*D8*50L	8		2	4	12	8	50
D10*45°*2.5*d5*17.5*D10*60L	10		2.5	5	17.5	10	60
D12*45°*3*d6*18*D12*60L	12		3	6	18	12	60
D14*45°*3.5*d7*23.5*D14*80L	14		3.5	7	23.5	14	80
D16*45°*4*d8*24*D16*80L	16		4	8	24	16	80

YP554G 双边燕尾刀 (4)
YP554G Bilateral Dovetail End Mill (4F)




技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)							
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel/ Tool Steel	合金鋼/工具 Alloy Steel/ Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Cast Iron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-
HRC<20	HRC<20~30	HRC<30~40	HRC<45~55	HRC<55~60	-	-	-
●	●	●	●		●	○	

规格 (Specification)	刃径 (CED)	角度 (A)	刃长 (CEL)	颈径 (ND)	颈长 (LN)	柄径 (SD)	总长 (OAL)
D2*60°*0.64*d0.9*2.5*D4*50L	2	60°	0.64	0.9	2.5	4	50
D3*60°*0.92*d1.4*3.5*D4*50L	3		0.92	1.4	3.5	4	50
D4*60°*1.24*d1.85*4*D4*50L	4		1.24	1.85	4	4	50
D5*60°*1.56*d2.3*5*D6*50L	5		1.56	2.3	5	6	50
D6*60°*1.9*d2.7*6*D6*50L	6		1.9	2.7	6	6	50
D8*60°*2.54*d3.6*8*D8*60L	8		2.54	3.6	8	8	60
D10*60°*3.18*d4.5*10*D10*75L	10		3.18	4.5	10	10	75
D12*60°*3.81*d5.4*11*D12*75L	12		3.81	5.4	11	12	75
D2*90°*1.1*d0.9*3*D4*50L	2	90°	1.1	0.9	3	4	50
D3*90°*1.6*d1.4*4*D4*50L	3		1.6	1.4	4	4	50
D4*90°*2.15*d1.85*5*D4*50L	4		2.15	1.85	5	4	50
D5*90°*2.7*d2.3*6*D6*50L	5		2.7	2.3	6	6	50
D6*90°*3.3*d2.7*7*D6*50L	6		3.3	2.7	7	6	50
D8*90°*4.4*d3.6*10*D8*60L	8		4.4	3.6	10	8	60
D10*90°*5.5*d4.5*12*D10*75L	10		5.5	4.5	12	10	75
D12*90°*6.6*d5.4*14*D12*75L	12		6.6	5.4	14	12	75
D2*120°*1.9*d0.9*4*D4*50L	2	120°	1.9	0.9	4	4	50
D3*120°*2.77*d1.4*5*D4*50L	3		2.77	1.4	5	4	50
D4*120°*3.72*d1.85*7*D4*50L	4		3.72	1.85	7	4	50
D5*120°*4.67*d2.3*8*D6*50L	5		4.67	2.3	8	6	50
D6*120°*5.71*d2.7*10*D6*50L	6		5.71	2.7	10	6	50
D8*120°*7.62*d3.6*13*D8*60L	8		7.62	3.6	13	8	60
D10*120°*9.53*d4.5*16*D10*75L	10		9.53	4.5	16	10	75
D12*120°*11.43*d5.4*19*D12*75L	12		11.43	5.4	19	12	75

804F 不锈钢专用铣刀 (4F)

804F Squire Endmill For Stainless Steel (4F)



技术参数/ Technology Parameters




被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-	-
○	○	○	○	○		●		●		

Specifications	CED	CEL	SD	OAL
D1*2.5H*D4*4T*50L	1	3	D4	50
D1.5*4H*D4*4T*50L	1.5	4	D4	50
D2*5H*D4*4T*50L	2	5	D4	50
D2.5*6.3H*D4*4T*50L	2.5	6.3	D4	50
D3*7.5H*D4*4T*50L	3	8	D4	50
D3*8H*D4*4T*50L	3	8	D4	50
D3*7.5H*D4*4T*75L	3	8	D4	75
D3.5*9H*D4*4T*50L	3.5	9	D4	50
D4*10H*D4*4T*50L	4	10	D4	50
D4*10H*D4*4T*75L	4	10	D4	75
D4*10H*D4*4T*100L	4	10	D4	100
D5*12.5H*D5*4T*50L	5	12.5	D5	50
D5*12.5H*D5*4T*75L	5	12.5	D5	75
D5*12.5H*D5*4T*100L	5	12.5	D5	100
D5*12.5H*D6*4T*50L	5	12.5	D6	50
D6*15H*D6*4T*50L	6	15	D6	50
D6*15H*D6*4T*75L	6	15	D6	75
D6*15H*D6*4T*100L	6	15	D6	100
D8*20H*D8*4T*60L	8	20	D8	60
D8*20H*D8*4T*75L	8	20	D8	75
D8*20H*D8*4T*100L	8	20	D8	100
D8*24H*D8*4T*60L	8	24	D8	60
D10*25H*D10*4T*75L	10	25	D10	75
D10*25H*D10*4T*100L	10	25	D10	100
D10*25H*D10*4T*150L	10	25	D10	150
D10*30H*D10*4T*75L	10	30	D10	75
D12*30H*D12*4T*75L	12	30	D12	75
D12*30H*D12*4T*100L	12	30	D12	100
D12*30H*D12*4T*150L	12	30	D12	150
D14*35H*D14*4T*100L	14	35	D14	100
D16*40H*D16*4T*100L	16	40	D16	100

YP602M 微小径加硬立铣刀 (2F)

YP602M Micro Diameter Endmill For Hard Material (2F)

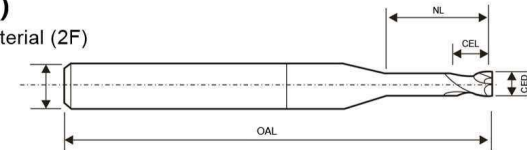


技术参数/ Technology Parameters



被切削材料應用表 (最適用● / ○適用)										
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel	耐熱鋼 Heat Resistant Steel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/FCI	SUS304	-	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-	-
●	●	●	●	●	○					

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.1*0.2*D4*50L*2T	φ0.1	0.2	4	50
D0.15*0.3*D4*50L*2T	φ0.15	0.3	4	50
D0.2*0.4*D4*50L*2T	φ0.2	0.4	4	50
D0.21*0.42*D4*50L*2T	φ0.21	0.42	4	50
D0.22*0.44*D4*50L*2T	φ0.22	0.44	4	50
D0.23*0.46*D4*50L*2T	φ0.23	0.46	4	50
D0.24*0.48*D4*50L*2T	φ0.24	0.48	4	50
D0.25*0.5*D4*50L*2T	φ0.25	0.5	4	50
D0.26*0.52*D4*50L*2T	φ0.26	0.52	4	50
D0.27*0.54*D4*50L*2T	φ0.27	0.54	4	50
D0.28*0.56*D4*50L*2T	φ0.28	0.56	4	50
D0.29*0.58*D4*50L*2T	φ0.29	0.58	4	50
D0.3*0.6*D4*50L*2T	φ0.30	0.6	4	50
D0.31*0.62*D4*50L*2T	φ0.31	0.62	4	50
D0.32*0.64*D4*50L*2T	φ0.32	0.64	4	50
D0.33*0.66*D4*50L*2T	φ0.33	0.66	4	50
D0.34*0.68*D4*50L*2T	φ0.34	0.68	4	50
D0.35*0.7*D4*50L*2T	φ0.35	0.7	4	50
D0.36*0.72*D4*50L*2T	φ0.36	0.72	4	50
D0.37*0.74*D4*50L*2T	φ0.37	0.74	4	50
D0.38*0.76*D4*50L*2T	φ0.38	0.76	4	50
D0.39*0.78*D4*50L*2T	φ0.39	0.78	4	50

YP602M 微小径加硬立铣刀 (2F)
YP602M Micro Diameter Endmill For Hard Material (2F)

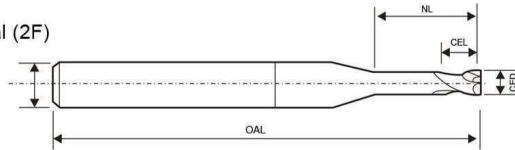


技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.4*0.8*D4*50L*2T	φ0.40	0.8	4	50
D0.41*0.82*D4*50L*2T	φ0.41	0.82	4	50
D0.42*0.84*D4*50L*2T	φ0.42	0.84	4	50
D0.43*0.86*D4*50L*2T	φ0.43	0.86	4	50
D0.44*0.88*D4*50L*2T	φ0.44	0.88	4	50
D0.45*0.9*D4*50L*2T	φ0.45	0.9	4	50
D0.46*0.92*D4*50L*2T	φ0.46	0.92	4	50
D0.47*0.94*D4*50L*2T	φ0.47	0.94	4	50
D0.48*0.96*D4*50L*2T	φ0.48	0.96	4	50
D0.49*0.98*D4*50L*2T	φ0.49	0.98	4	50
D0.5*1*D4*50L*2T	φ0.50	1	4	50
D0.51*1.02*D4*50L*2T	φ0.51	1.02	4	50
D0.52*1.04*D4*50L*2T	φ0.52	1.04	4	50
D0.53*1.06*D4*50L*2T	φ0.53	1.06	4	50
D0.54*1.08*D4*50L*2T	φ0.54	1.08	4	50
D0.55*1.1*D4*50L*2T	φ0.55	1.1	4	50
D0.56*1.12*D4*50L*2T	φ0.56	1.12	4	50
D0.57*1.14*D4*50L*2T	φ0.57	1.14	4	50
D0.58*1.16*D4*50L*2T	φ0.58	1.16	4	50
D0.59*1.18*D4*50L*2T	φ0.59	1.18	4	50
D0.6*1.2*D4*50L*2T	φ0.60	1.2	4	50
D0.61*1.22*D4*50L*2T	φ0.61	1.22	4	50
D0.62*1.24*D4*50L*2T	φ0.62	1.24	4	50
D0.63*1.26*D4*50L*2T	φ0.63	1.26	4	50
D0.64*1.28*D4*50L*2T	φ0.64	1.28	4	50
D0.65*1.3*D4*50L*2T	φ0.65	1.3	4	50

YP602M 微小径加硬立铣刀 (2F)
YP602M Micro Diameter Endmill For Hard Material (2F)

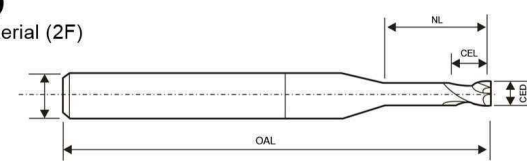

技术参数/ Technology Parameters

被切削材料應用表 (最適用● / ○適用)									
碳素鋼/合金鋼 Carbon Steel/ Alloy Steel	合金鋼/工具 Alloy Steel Tool Steel	合金鋼/工具 Alloy Steel Tool Steel	調質鋼 Hardened Steel	調質鋼 Hardened Steel	鑄鐵 Castiron	不銹鋼 Stainless Steel	銅/鋁 Copper Aluminum	鈦合金 Titanium Alloy	鍍 Nickel
S45C,S50C,SCM	S45C,SKT,SKD	S45C,SKT,SKD	SKT,SKD	SKT,SKD	FC/CD	SUS304	-	-	-
HRC<20	HRC<20-30	HRC<30-40	HRC<45-55	HRC<55-60	-	-	-	-	-
●	●	●	●	●	○				

规格 (Specification)	刃径 (CED)	刃长 (CEL)	柄径 (SD)	总长 (OAL)
D0.66*1.32*D4*50L*2T	φ0.66	1.32	4	50
D0.67*1.34*D4*50L*2T	φ0.67	1.34	4	50
D0.68*1.36*D4*50L*2T	φ0.68	1.36	4	50
D0.69*1.38*D4*50L*2T	φ0.69	1.38	4	50
D0.7*1.4*D4*50L*2T	φ0.70	1.4	4	50
D0.71*1.42*D4*50L*2T	φ0.71	1.42	4	50
D0.72*1.44*D4*50L*2T	φ0.72	1.44	4	50
D0.73*1.46*D4*50L*2T	φ0.73	1.46	4	50
D0.74*1.48*D4*50L*2T	φ0.74	1.48	4	50
D0.75*1.5*D4*50L*2T	φ0.75	1.5	4	50
D0.76*1.52*D4*50L*2T	φ0.76	1.52	4	50
D0.77*1.54*D4*50L*2T	φ0.77	1.54	4	50
D0.78*1.56*D4*50L*2T	φ0.78	1.56	4	50
D0.79*1.58*D4*50L*2T	φ0.79	1.58	4	50
D0.8*1.6*D4*50L*2T	φ0.80	1.6	4	50
D0.81*1.62*D4*50L*2T	φ0.81	1.62	4	50
D0.82*1.64*D4*50L*2T	φ0.82	1.64	4	50
D0.83*1.66*D4*50L*2T	φ0.83	1.66	4	50
D0.84*1.68*D4*50L*2T	φ0.84	1.68	4	50
D0.85*1.7*D4*50L*2T	φ0.85	1.7	4	50
D0.86*1.72*D4*50L*2T	φ0.86	1.72	4	50
D0.87*1.74*D4*50L*2T	φ0.87	1.74	4	50
D0.88*1.76*D4*50L*2T	φ0.88	1.76	4	50
D0.89*1.78*D4*50L*2T	φ0.89	1.78	4	50
D0.9*1.8*D4*50L*2T	φ0.90	1.8	4	50
D0.95*1.9*D4*50L*2T	φ0.95	1.9	4	50

平底铣刀
球头铣刀
长颈球头
圆鼻铣刀
长颈圆鼻
螺纹铣刀
钻头
螺纹刀头
抗震刀杆
刀粒